

HexaDrain Brickslot is a recyclable polypropylene slotted trench drain system that provides effective, yet discreet, slot drainage in domestic paver or tile installation.


Cellular construction allows for simple “push-fit” of channels and accessories. Access to system for maintenance is through the removable cover on the corner unit.

Suitable for pedestrian/light vehicle traffic applications such as:

- Residential driveways
- Patios
- Walkways
- Doorways
- Pools




**Product Overview**

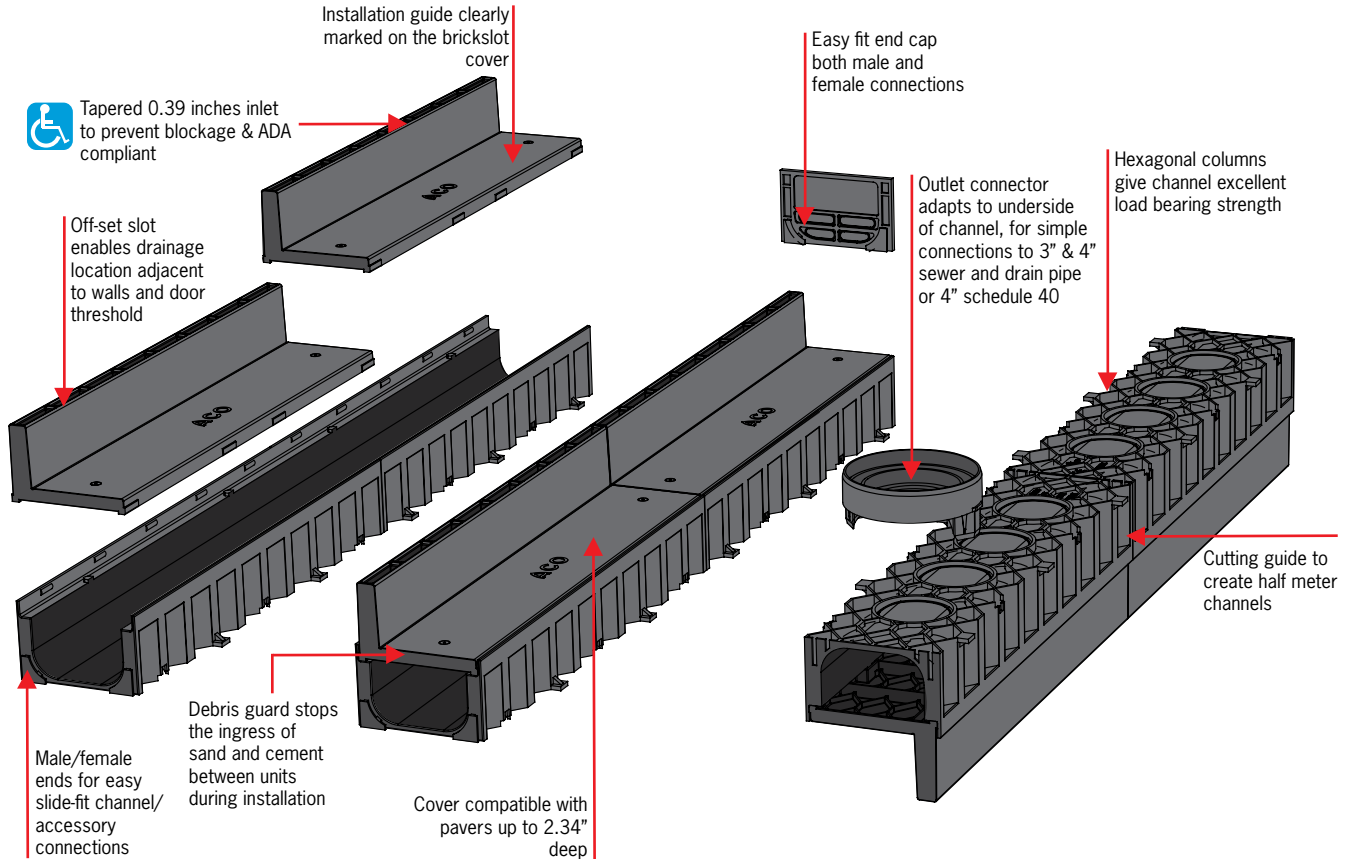

## Part Table

	Part No.	Length inches	Width inches	Height inches	Wgt. lbs.
Black channel with black plastic slot cover	19555	39.4	4.8	5.4	3.9
Brickslot corner unit black	19560	4.8	7.2	0.8	
Accessory pack - 2 end caps, bottom outlet & leaf guard	19292	-	-	-	0.4

## Installation Instructions

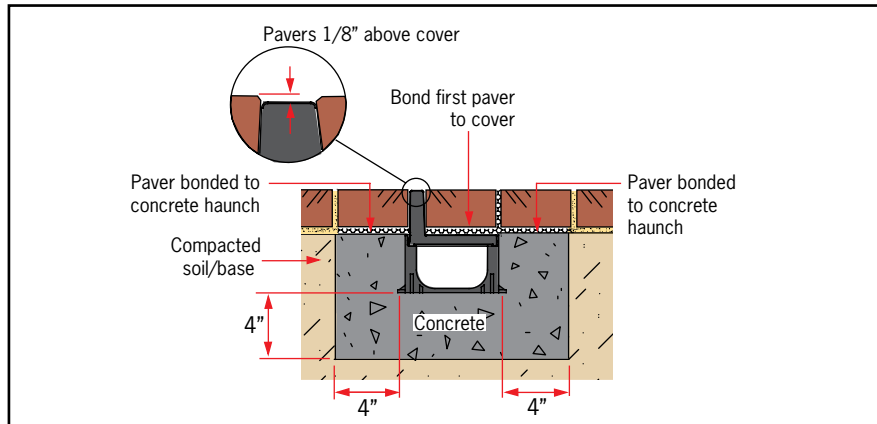

For driveway applications, trench drain **MUST** be surrounded by 4" of concrete.

## Accessories

### Corner unit :

Allows up to 4 channel connection. Use as access to outlet pipes for maintenance

\* Requires  
4" flex  
adaptor to  
fit to outlet  
pipe or  
use vertical  
bottom outlet  
adaptor on  
channel



### Accessory pack including:

2# - closing end caps



1# - vertical outlet



1# - leaf guard



Excavate area to accommodate trench drain and 4" concrete surround, compact base.



Lay 4" deep concrete bed. Cut channels to fit required length (if necessary).



Knockout channel base for outlet at required position.



Push-fit outlet adaptor into bottom of channel, lay outlet channel first and connect to 3" or 4" SDR pipe or 4" schedule 40. Alternatively, use 4" flex coupling to connect 4" SDR pipe to outlet on base of corner unit, set in place and lay channels from that point.



HexaDrain Brickslot is easily cut using a hacksaw. Channels have a half meter (19.69") cutting guide.



Lay remaining channels, units slide-fit together. Finish pavement/pavers must be an 1/8" higher than edges of drain. Bond pavers to cover and concrete haunch to prevent damage to slot when trafficked.

For pedestrian only applications, trench drain can be set directly on well compacted soil.



DH Integral Solution S.A. De C.V.,

Bosques de Bologna Mz 01 Lote 10, Bosques Del Lago, Cuautitlán Izcalli, C.P. 54766.

Tel 55313250. WhatsApp 5531024521. recepción @dhintegralsolution.com. www.dhintegralsolution.com